

Processes

Stick, TIG, MIG, Flux-Cored

Product Number

7022110700 Mobiflex® 200-M

7045400700 Mobiflex® 400-MS

See page 4 for additional models and complete specs

Filter Type

Cellulose or High Efficiency
Cellulose/Polyester

Input Power

240V/1Ph/60Hz
(230/1/50 also available)

Input Current

3A

Weight/Dimensions (H x W x D)

See Page 4

ADVANTAGE

- ▶ **Generous airflow** – 1250m³/h with LFA 3.1/4.1 extraction arm⁽²⁾.
- ▶ **Front casters and rear wheels** – provide mobility.
- ▶ **Low noise operation** – 69 dBA.
- ▶ **Internal spark arrestor** – also functions as a pre-filter for larger-sized particulate.
- ▶ **Choice of filter types** – cellulose or high efficiency cellulose/polyester.
- ▶ **Optimal motion and reach for work area** – choose from a variety of extraction arm models or select a hose/hood set.
- ▶ **One-year warranty** (30 day warranty on filter)

200-M Model

- ▶ **Filter status indicator** – visual guide to remaining filter life.
- ▶ **Large filter capacity** – 50 m²

400-MS Model

- ▶ **RotaPulse® automatic cleaning system** – simplifies filter maintenance.
- ▶ **Large filter capacity** – 30 m²

WHAT'S INCLUDED

- ▶ Filter
- ▶ Flexible hose for connecting extraction arm
- ▶ Factory-installed transformer relay kit
- ▶ 19 ft. (6 m) input power cord

WHAT'S REQUIRED

- ▶ Extraction arm or hose/hood set
- ▶ Compressed air, 90-100 psi (Mobiflex® 400-MS only)

INPUT



Shown: Mobiflex® 200-M with required Extraction Arm

Shown: Mobiflex® 400-MS with required Extraction Arm

Mobile Welding Fume Extractors with Filtration

The Mobiflex® 200-M and 400-MS are low vacuum systems for welding fume extraction and filtration. Their size and mobility make them ideal for smaller manufacturing facilities that require light to medium duty welding fume extraction⁽¹⁾ in variable locations.

(1) Not suitable for use with cutting or arc gouging operations.

(2) CFM level is dependent upon arm length, fan type and system maintenance.

Mobiflex® 200-M and 400-MS

A CLOSER LOOK

PERFORMANCE

Mobiflex® 200-M Filter System

The LongLife filter in the Mobiflex® 200-M has a surface area of 538 ft² (50 m²), making it one of the largest disposable filter cartridges in its class. The combination of filter size and unique 3D-pleated structure results in higher filter efficiency, longer filter life, and lower operational costs.

A filter status indicator located on the front of the Mobiflex® 200-M gradually moves from white to red as the filter becomes saturated with particulate, providing visual indication of when system maintenance and filter replacement is necessary.

A washable aluminum pre-filter removes larger-sized particulate and provides spark entrapment.

Mobiflex® 400-MS Filter System

The LongLife filter in the Mobiflex® 400-MS has a surface area of 325 ft² (30 m²). The combination of filter size and wedge-shaped filter pattern results in higher filter efficiency, longer filter life, and lower operational costs.

Unique to the Mobiflex® 400-MS is an electronic pressure differential system for filter cleaning. The system measures static air pressure as it enters and exits the filter cartridge and if the air pressure entering the filter unit is greater than the air pressure exiting the filter unit by a set amount, the electronic circuit activates the filter cartridge cleaning system.

The RotaPulse® filter cleaning system uses compressed air released through multiple air jets to clean a section of the filter at each air burst. A complete cleaning cycle can also be activated by depressing a manual switch on the front of the control panel. Particulate blown off the filter cartridge settles into a plastic collection bin. When cleaning the filter cartridge is no longer effective, the electronic circuit will indicate a full filter cartridge by blinking the light on the front control panel.

Extraction Arms

No matter if you are working in a small work station, under a low ceiling, or in a large fabrication area, one of Lincoln Electric's fume extraction arms is right for you. The flexible extraction arms are built the Lincoln way—rugged and reliable. Low vacuum extraction arms are designed for high volume/low velocity air movement and enable the arm to be positioned at a distance of 6-12 inches (152-304 mm) from the welding fume source. The arms provide welders optimal motion and reach for their specific welding position(s) and work area.

The arms come equipped with a 360° rotatable hood for optimal positioning allowing a larger work envelope with less repositioning of the arm and increased operator visibility. With the extraction arm correctly positioned, the welding fume particulate can be effectively drawn away from the operator's breathing zone, as well as eliminate the residual fume particulate that often rises and hovers within the facility.

With a unique spring-balanced internal mechanism, Lincoln Electric's fume extraction arms provide a long-lasting, user-friendly solution. The extraction arm's external shell is made of solid, lightweight dent and scratch resistant tubing. Incorporated into the arm is an airflow throttle valve and extraction focus spoiler.

Some models include a clear halogen lamp and automatic start/stop feature. With the use of an arc sensor, the system automatically starts and stops the fan unit, providing hands-free operation and energy conservation. All this combined provides a highly effective system with maximum efficiency and minimal disruption to welder productivity.



Rotatable Hood




Mobiflex® 200-M Filter



Filter shown inside Mobiflex® 200-M (cover removed)



Internal view of Mobiflex® 400-MS showing RotaPulse® self-cleaning filter mechanism.

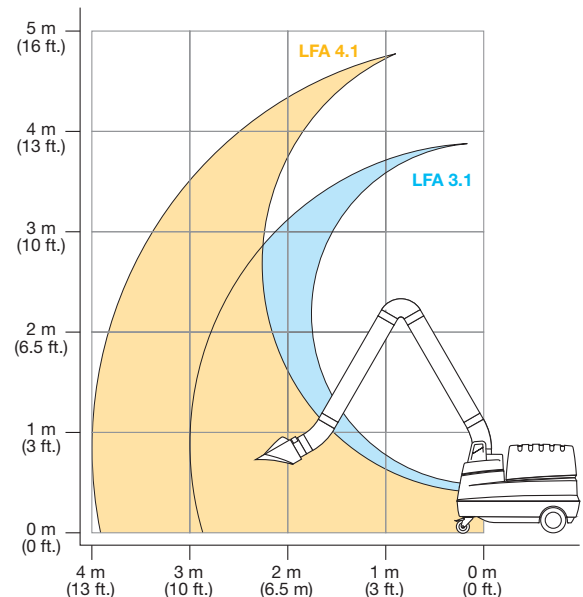

Mobiflex® 200-M and 400-MS Reach

Mobiflex® 200-M and 400-MS

REQUIRED ACCESSORIES



LFA 3.1 (10 ft.) and LFA 4.1 (13 ft.) Extraction Arm
Extraction arms with 360° rotatable hood, airflow throttle valve, extraction focus spoiler, and handle for easy positioning.
Order:
7925170180A LFA 3.1
7925220180A LFA 4.1

Hose and Hood Set
Flexible extraction hose with magnetic hood set. Ideal for those hard to access fume extraction applications. Hose is reinforced with outside steel rings to protect against wear and crushing. Diameter of hose is 5.75 in. (146 mm), length is 16.4 ft. (5 m). Includes one clamp.
Order 7900068030



Hose and Hood Set shown installed on Mobiflex® base unit

EXTRACTION ARM SPECIFICATIONS

Product Name	Product Number	Arm Length m	Dimensions H x W mm	Net Weight kg
LFA 3.1	7925170180A	3.1	208 x 3,000	15
LFA 4.1	7925220180A	4.1	208 x 4,000	17

LFA 4.1 with lamp and sensor options available

RECOMMENDED ACCESSORIES TO EXPAND MACHINE CAPABILITIES




GENERAL OPTIONS
Starter Overload Switch for 230V
This overload switch retrofits the 115V extraction unit for 230V operation.
Order



GENERAL OPTIONS
MOBIFLEX® 200-M ONLY
Cellulose Filter
Use as replacement for cellulose filter included with models K1653-2 and K2497-2 Mobiflex® 200-M.
Order



Cellulose/Polyester High Efficiency Filter
Use as replacement for cellulose/polyester high efficiency filter included with model K1653-3 Mobiflex® 200-M. Filter class MERV 16 per ASHRAE 52.2. Filter can also be used in models K1653-2 and K2497-2.
Order 9850060250




Activated Carbon Filter
Activated carbon filter installs over cellulose (K1673-1) or cellulose/polyester filter (K1673-3) and is designed to neutralize welding fume odors.
Order 9850070060



GENERAL OPTIONS
MOBIFLEX® 400-MS ONLY
Cellulose Filter
Use as replacement for cellulose filter included with models K1741-1 and K2497-4 Mobiflex® 400-MS.
Order 9850060110



Cellulose/Polyester High Efficiency Filter
Use as replacement for cellulose/polyester high efficiency filter included with model K1741-2 Mobiflex® 400-MS. Filter class MERV 16 per ASHRAE 52.2. Filter can also be used in models K1741-1 and K2497-4.
Order 9850060240

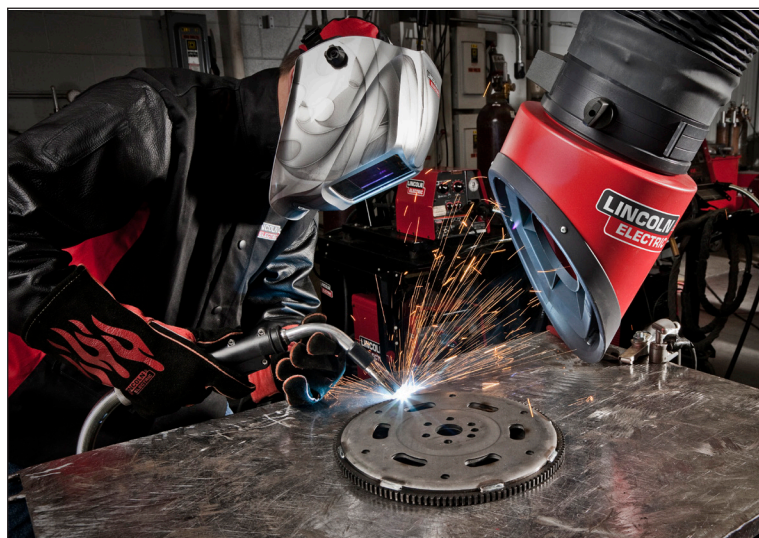

Mobiflex® 200-M and 400-MS

TECHNICAL SPECIFICATIONS

Product Name	Product Number	Filter Type/ Filter Size	Input Power Voltage/Phase/ Hertz	Input Current	Dimensions H x W x D mm	Net Weight kg
Mobiflex® 200-M Base Unit	7022110700	Cellulose 50 m ²	240/1/50	9A	900 x 810 x 1210	111
Mobiflex® 400-MS Base Unit	7045400700	Cellulose 30 m ²			1020 x 810 x 1210	130



The operation of welding fume control equipment is affected by various factors including proper use and positioning of the equipment, maintenance of the equipment and the specific welding procedure and application involved. Worker exposure level should be checked upon installation and periodically thereafter to be certain it is within applicable OSHA PEL and ACGIH TLV limits.

CUSTOMER ASSISTANCE POLICY

The business of The Lincoln Electric Company is manufacturing and selling high quality welding equipment, consumables, and cutting equipment. Our challenge is to meet the needs of our customers and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric for advice or information about their use of our products. We respond to our customers based on the best information in our possession at that time. Lincoln Electric is not in a position to warrant or guarantee such advice, and assumes no liability, with respect to such information or advice. We expressly disclaim any warranty of any kind, including any warranty of fitness for any customer's particular purpose, with respect to such information or advice. As a matter of practical consideration, we also cannot assume any responsibility for updating or correcting any such information or advice once it has been given, nor does the provision of information or advice create, expand or alter any warranty with respect to the sale of our products. Lincoln Electric is a responsive manufacturer, but the selection and use of specific products sold by Lincoln Electric is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric affect the results obtained in applying these types of fabrication methods and service requirements.

Subject to Change - This information is accurate to the best of our knowledge at the time of printing.

LINCOLN®
ELECTRIC
THE WELDING EXPERTS®