

OA, OP, P & A SERIES WELDING GAS REELS

APPLICATION

An ideal compact solution for all gas welding, cutting and shielding gas hose applications. When hoses are stored by wrapping them around bottles or trolleys there is a greater potential of a fire risk. A hose reel creates a safer working environment by keeping the hose neatly coiled away from the ignition source. Plus, a unique external swivel design enables easy maintenance of O-rings and seals.

HOSE TYPE	Rubber gas hose. Complies with AS/NZS1335.
MEDIA	See table below
MINIMUM TEMP	-20°C
MAXIMUM TEMP	80°C
MAX PSI	300
FITTING TYPE	UNF*
WEIGHT	12kg
COMPLIES TO	AS/NZS1335:1995




FEATURES



FOR MORE
WELDING
REELS SEE
PAGE 72

DIMENSIONS

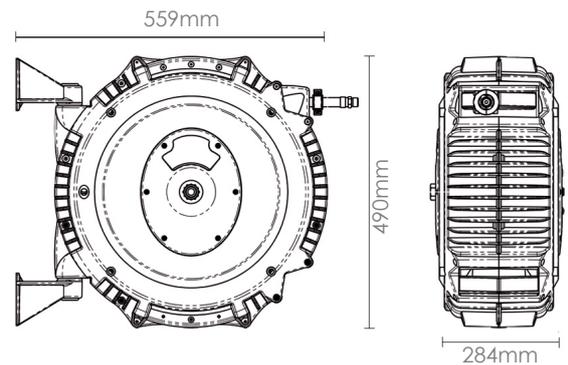

All fuel and oxygen gas swivels are leak tested at 1.4psi low pressure test & 140psi high pressure test.

*Hose design specifications are available to meet international standards such as EN599.

**NPT, JIC, JIS and Metric threads available on request.

OA SERIES - OXYGEN & ACETYLENE				
Model	Hose ID	Hose Length	Inlet Fitting	Outlet Fitting
OA68	6mm	8m	5/8" UNFM	5/8" UNFF
OA615	6mm	15m	5/8" UNFM	5/8" UNFF
OP SERIES - OXYGEN & PROPANE (LPG)				
OP68	6mm	8m	5/8" UNFM	5/8" UNFF
OP615	6mm	15m	5/8" UNFM	5/8" UNFF
P SERIES - PROPANE (LPG)				
P620	6mm	20m	5/8" UNFM	5/8" UNFF
P1015	10mm	15m	5/8" UNFM	5/8" UNFF
A SERIES - ARGON				
A620	6mm	20m	5/8" UNFM	5/8" UNFF

= Quick Ship Item, see inside back cover for more information.