


XT4000

60A @ 60% Duty Cycle, EN60974-7



PIN CONFIGURATION

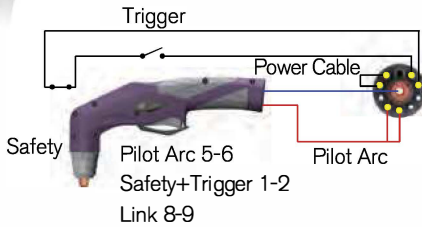

ALTERNATIVE PIN CONFIGURATIONS AVAILABLE
See pages 285 for more information.

TORCH MODEL

STOCK CODE	REFERENCE	DESCRIPTION	TERMINATION
XTP40-6-CC	XT4000	Parweld 60A Plasma Cutting Torch x 6m Coaxial Cable	Central Connector
XTP40M-6-CC	XT4000	Parweld 60A Machine Cutting Torch	Central Connector
XTP40-6-M4	XT4000	Parweld 60A Plasma Cutting Torch x 6m Composite Cable	M14
XTP40-6-SP	XT4000	Parweld 60A Plasma Cutting Torch x 6m Composite Cable	Separates

TECHNICAL DATA

Voltage Class	M	Air Pressure	5 Bar
Standard Length	6m	Duty Cycle 60%	60A
Air Consumption	150 l/min	Start Method	Pneumatic Ignition

CONSUMABLES

1	XT4008	Double Pointed Spacer
2	XT4007	Retaining Cap
3	XT4005-08	Cutting Tip 0.8mm 20-30A
4	XT4005-09	Cutting Tip 0.9mm 30-40A
5	XT4005-10F	Flat Cutting Tip 1.0mm 40-50A
	XT4005-11F	Flat Cutting Tip 1.1mm 50-60A
6	XT4005-08L	Extended Cutting Tip 0.8mm 20-30A

CONSUMABLES

7	XT4005-09L	Extended Cutting Tip 0.9mm 30 40A
8	XT4006	Gas Distributor
9	XT4003	Electrode
10	XT4003L	Extended Electrode
11	XT4010	O' Ring
12	XT4001	Torch Head
13	PWXT4011	Handle c/w Trigger