


BREAK THROUGH TECHNOLOGY!





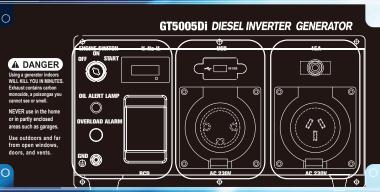

- Output 5500W (Max.), 5000W (Rated)
- Digital Engine Controller matches engine speed with power output load
- Pure Sine Wave Inverter Power output suitable for electronic tools and appliances
- Easy and accessible maintenance points
- Compact, efficient and robust single cylinder diesel engine
- Strong roll cage frame for easy transportation and protection
- Hour meter and LCD Display of generator parameters
- Electric Start for quick and convenient power
- 1x 32A, 1x 15A 230V 50Hz









OUTPUT (Max)	AMPS (Max)	OUTPUT (Rated)	kVA	ENGINE TYPE	dBA RATING	STARTING SYSTEM	FUEL TANK CAPACITY	RUN TIME	LOW OIL ALERT	POWER OUTLETS	LxWxH (mm)	WEIGHT
5500W	21.7A	5000W	6.9	4 Stroke OHV	84 @7m	Electric Start /Recoil	18L	10hrs @50%	✓	2	610x510x640	97kg







Single Phase - 230V 5500W 6.9kVA

