


# PROLINE

professional welding supplies

## XP8 200A

AIR COOLED MIG TORCH

200A, 6kW, Mixed Gas (80/20) @ 80% Duty Cycle, EN60974-7, 0.6mm-1.2mm (.023"-.045") Wires

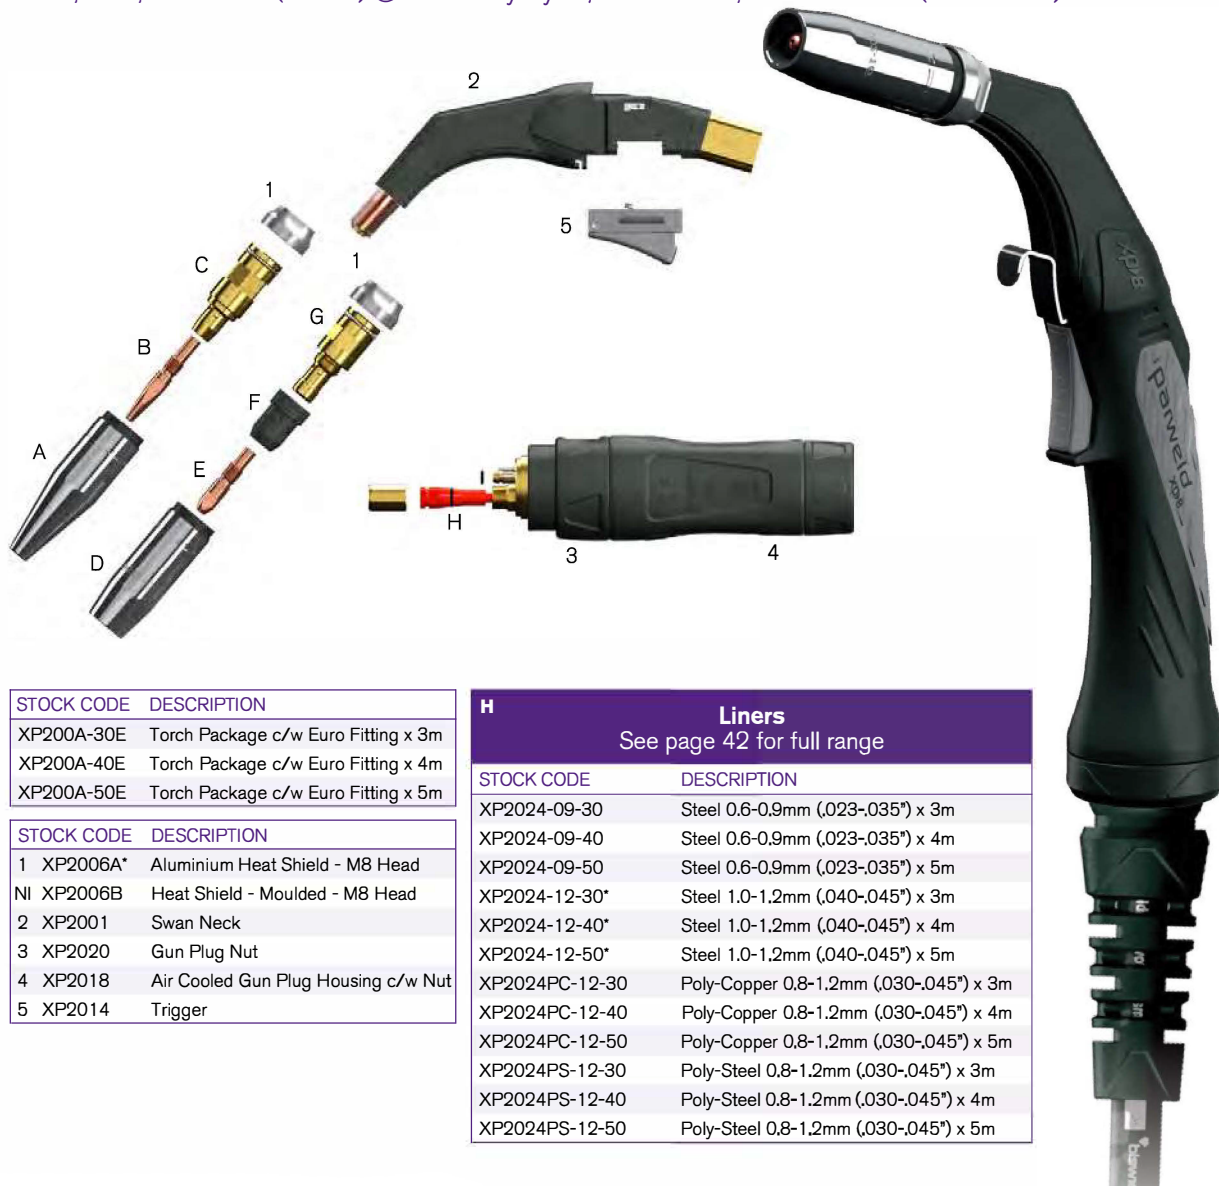

STOCK CODE	DESCRIPTION
XP200A-30E	Torch Package c/w Euro Fitting x 3m
XP200A-40E	Torch Package c/w Euro Fitting x 4m
XP200A-50E	Torch Package c/w Euro Fitting x 5m

STOCK CODE	DESCRIPTION
1 XP2006A*	Aluminium Heat Shield - M8 Head
NI XP2006B	Heat Shield - Moulded - M8 Head
2 XP2001	Swan Neck
3 XP2020	Gun Plug Nut
4 XP2018	Air Cooled Gun Plug Housing c/w Nut
5 XP2014	Trigger

H Liners See page 42 for full range	
STOCK CODE	DESCRIPTION
XP2024-09-30	Steel 0.6-0.9mm (.023-.035") x 3m
XP2024-09-40	Steel 0.6-0.9mm (.023-.035") x 4m
XP2024-09-50	Steel 0.6-0.9mm (.023-.035") x 5m
XP2024-12-30*	Steel 1.0-1.2mm (.040-.045") x 3m
XP2024-12-40*	Steel 1.0-1.2mm (.040-.045") x 4m
XP2024-12-50*	Steel 1.0-1.2mm (.040-.045") x 5m
XP2024PC-12-30	Poly-Copper 0.8-1.2mm (.030-.045") x 3m
XP2024PC-12-40	Poly-Copper 0.8-1.2mm (.030-.045") x 4m
XP2024PC-12-50	Poly-Copper 0.8-1.2mm (.030-.045") x 5m
XP2024PS-12-30	Poly-Steel 0.8-1.2mm (.030-.045") x 3m
XP2024PS-12-40	Poly-Steel 0.8-1.2mm (.030-.045") x 4m
XP2024PS-12-50	Poly-Steel 0.8-1.2mm (.030-.045") x 5m

**Tapered Nozzles**

**A**

80mm (3.15")  
 Ø25mm Bore  
 3mm (1/8") tip recess  
 Ø19mm

STOCK CODE	STYLE	BORE
XP2002-07T	Tapered	7mm (9/32")
XP2002-10T	Tapered	10mm (3/8")

**Tapered Contact Tips**

**B**

50mm (1.97")  
 Ø8mm  
 M8

STOCK CODE	WIRE SIZE	MATERIAL
XP2003-06T	0.6mm (.023")	CuCrZr
XP2003-08T	0.8mm (.030")	CuCrZr
XP2003-09T	0.9mm (.035")	CuCrZr
XP2003-10T	1.0mm (.040")	CuCrZr
XP2003-12T	1.2mm (.045")	CuCrZr

**Tapered Head Assembly**

**C**

50mm (1.97")  
 M8  
 1/4" BSP  
 Ø19mm

STOCK CODE	TIP THREAD
XP2005T	M8

**Nozzles**

**D**

65mm (2.55")  
 Ø25mm Bore  
 Flush tip recess  
 Ø19mm

STOCK CODE	STYLE	BORE
XP2002-10	Tapered	10mm (3/8")

68mm (2.67")  
 Ø25mm Bore  
 2.4mm (3/32") tip recess  
 Ø19mm

STOCK CODE	STYLE	BORE
XP2002-13	Tapered	13mm (1/2")
XP2002-16*	Conical	16mm (5/8")
XP2002-19	Cylindrical	19mm (3/4")

**Extended Nozzles**

72mm (2.83")  
 Ø25mm Bore  
 6.5mm (1/4") tip recess  
 Ø19mm

STOCK CODE	STYLE	BORE
XP2002-16L	Conical Ext	16mm (5/8")
XP2002-19L	Cylindrical Ext	19mm (3/4")

**Contact Tips**

**E**

38mm (1 1/2")  
 Ø8mm  
 M8

XP2003-06	0.6mm (.023")	CuCrZr
XP2003-08	0.8mm (.030")	CuCrZr
XP2003-09	0.9mm (.035")	CuCrZr
XP2003-10*	1.0mm (.040")	CuCrZr
XP2003-12	1.2mm (.045")	CuCrZr
XP2003-10A	1.0mm (.040")	CuCrZr, Al
XP2003-12A	1.2mm (.045")	CuCrZr, Al

**Diffusers**

**F**

26mm (1.02")  
 Ø8.4mm  
 9/16" UNF

STOCK CODE	TYPE	HEAD
XP2004B*	Plastic	M8
XP2004C (Ni)	Ceramic	M8

**Head Assembly**

**G**

48mm (1.89")  
 M8  
 9/16" UNF  
 1/4" BSP  
 Ø19mm

STOCK CODE	HEAD
XP2005*	M8