



Powermax30[®] AIR

Professional-grade plasma system with internal air compressor for high portability and easy metal cutting.



Capacity	Thickness	Cut speed
	Cutting	
Recommended	5/16"	20 ipm
	3/8"	10 ipm
Severance	5/8"	5 ipm

Easy-to-setup and operate

- Operate it anywhere with the internal air compressor.
- Plug into any 120 or 240 V power with Auto-Voltage™ technology and included plug adapters.
- Highly portable. The smallest, lightest weight system in its class.

Finish jobs faster

- Do more in less time. Fast cutting speeds and superior cut quality result in less secondary operations.
- Quickly cut metal grate or rusted metal without retriggering with the continuous pilot arc feature.
- One tool to cut a variety of metal types and thicknesses.


Rugged and reliable

- New AIR T30 torch is rugged and designed to withstand the toughest environments.
- Robust internal air compressor eliminates the costs associated with an external compressor.
- Hypertherm Certified™ reliability ensures performance in the most demanding environments



AIR T30 hand torch

Relative cut performance on mild steel

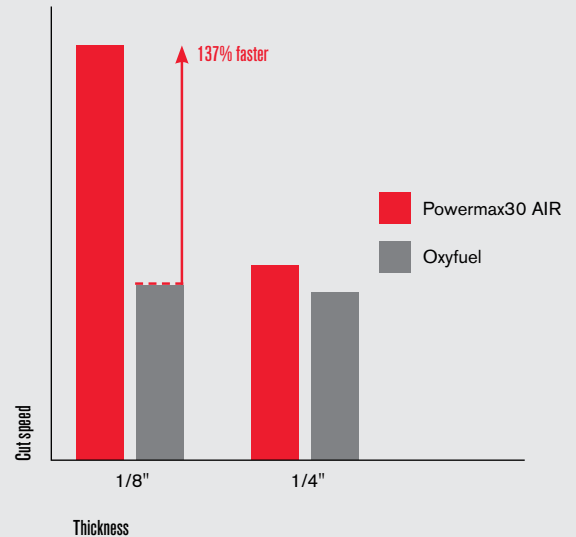

PROLINE WELDING SUPPLIES
0800 NZ WELD - (0800 699 353)
SALES@PROLINEWELDING.COM
WWW.WELDINGSUPPLIES.CO.NZ

System includes

- Power supply, AIR T30 hand torch with 15' lead and work clamp with 15' lead
- 240 V/20 A plug with adapters for 120 V/15 A and 240 V/20 A circuits
- Operator and safety manuals
- 1 nozzle and 1 electrode
- Carrying strap

Ordering information

Power supply	System part number with 15' AIR T30 torch
120-240 V	088096

Torch consumable parts

Consumable type	Torch type	Amperage	Shield/Deflector	Retaining cap	Nozzle	Swirl ring	Electrode
Standard	Hand	30	420399	420135	420134	420133	420132

Electrodes and nozzles are sold in packs of five, as well as combination packs of 2 electrodes and 2 nozzles (part number 428350)



High performing technology

The new patent-pending consumable designs enable consistent cutting by optimizing the air flow from the compact, internal compressor. Coupled with the highly effective moisture removal system, the Powermax30 AIR provides great cut quality and performance in hot and humid conditions.



Customer testimonial

“Because our company provides service in very remote places where the access for air compressors is very limited, the portability of the Powermax30 AIR with the internal compressor, makes it ideal for field services. It also eliminates the need for oxyfuel cutting, consequently reducing the cost and increasing the productivity of the cutting process.”

Diego Nunes Fernando, BNG Metalmeccânica, Brazil

Specifications

Input voltages	120-240 V, 1-PH, 50/60 Hz
Input current @ 2.5 kW	120-240 V, 1-PH, 29-15 A
Output current	15-30 A
Rated output voltage	83 VDC
Duty cycle @ 104° F	35%, 240 V 20%, 120 V
Open circuit voltage (OCV)	256 VDC
Dimensions with handles	16.5" D; 7.7" W; 13.1" H
Weight w/15' torch	29.8 lbs
Input power cable length	10'
Power supply type	Inverter - IGBT
Engine drive requirement	5.5 kW for full 30 A output
Certifications	CSA-certified for use in the Americas and Asia, except China.
Warranty	Power supply: 3-year Torch: 1-year

Cutting with 120 V input power


At the maximum recommended output of 20 A, the cut capacities are:

- 10 gauge at 30 ipm
- 1/4" at 14 ipm
- 3/8" at 5 ipm

Superior performance with high portability

Compared to competitive models with internal compressors, the Powermax30 AIR has the highest power-to-weight ratio which means it has the most cutting power in the lightest weight design.

Amps/weight

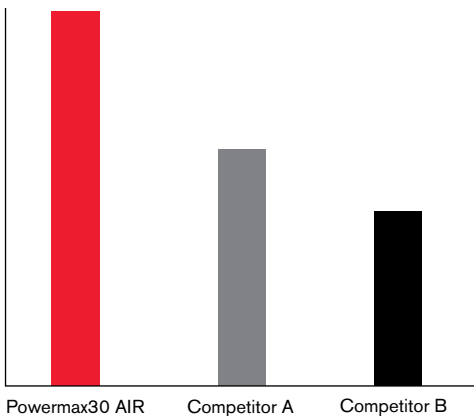

Common applications

HVAC, property/plant maintenance, fire and rescue, general fabrication, plus:



Construction



Vehicle repair and modification



Agricultural

Recommended Hypertherm genuine accessories



Face shield

Clear face shield with flip-up shade for cutting and grinding. Safety shield included. ANSI Z87.1, CSA Z94.3, CE.

127239 Face shield shade 6

127103 Face shield shade 8



Flip-up eyeshades

Shade 5 (for <40 A) flip-up shade, anti-scratch lens and adjustable frame. ANSI Z87.1, CSA Z94.3, CE.

017033 Flip-up eyeshades



Hyamp™ cutting and gouging gloves

Insulated for heavy duty applications. Gun-cut palm design with seamless trigger finger and extended cuff provide flexibility and protection.

017025 Medium

017026 Large

017027 X-large

017028 2X-large



Circle cutting guides

Quick and easy set up for accurate circles up to 28" diameter. For optional use as a stand-off guide for straight and bevel cuts. Made in USA.

127102 Basic kit – 15" arm, wheels and pivot pin

027668 Deluxe kit – 11" arm, wheels, pivot pin, anchor base and plastic case



System dust covers

Made from a flame-retardant vinyl, a dust cover will protect your Powermax® system for years. Made in USA.

127469 Cover, Powermax30 AIR



Pocket level and tape holder

Magnetic base and tape holder with built-in level. Made in USA.

017044 Pocket level and tape holder

Engineered and assembled in the USA

ISO 9001:2008

Environmental stewardship is a core value of Hypertherm. Our Powermax products are engineered to meet and exceed global environmental regulations including the RoHS directive.



Hypertherm, Powermax, Auto-Voltage, Hypertherm Certified, and Hyamp are trademarks of Hypertherm Inc. and may be registered in the United States and/or other countries. All other trademarks are the properties of their respective owners.

© 8/2016 Hypertherm Inc. Revision 1
860620

PROLINE WELDING SUPPLIES
0800 NZ WELD - (0800 699 353)
SALES@PROLINEWELDING.COM
WWW.WELDINGSUPPLIES.CO.NZ

Hypertherm[®]
SHAPING POSSIBILITY™

