

Strata WP9, WP20 Pyrex Cup & Gas Lens TIG Torch Setup



	Part Number	Product SKU	Description
1	TPC-12	204618	Strata #12 Pyrex Gas Lens Cup. Bore 19mm, Length 42mm
2	TOR-R	204614	Strata Red Oring for Pyrex #12 Gas Lens Cup
3	TPCA-12	204619	Strata Brass Adaptor with Oring (For Fitting #12 Pyrex Cups to SC Series Gas Lens)
4	TGL45V43	201035	Strata 1.6mm Gas Lens Collet Body
	TGL45V44	201036	Strata 2.4mm Gas Lens Collet Body
	TGL45V45	201037	Strata 3.2mm Gas Lens Collet Body
5	TC13N22	200916	Strata 1.6mm Collet
	TC13N23	200919	Strata 2.4mm Collet
	TC13N24	200921	Strata 3.2mm Collet
6	THS598882	201047	Strata Heat Shield
7	TBC41V33	200884	Strata Short Back Cap
	TBC41V35	200885	Strata Medium Back Cap
	TBC41V24	200883	Strata Long Back Cap

1. Install the heat shield

2. Install the gasket

3. Install the gas lens collet body


4. Install the brass adaptor with o-ring

5. Install the pyrex gas lens cup

6. Install the collet, tungsten and back cap



Strata WP17, WP18, WP26 Pyrex Cup & Gas Lens Tig Torch Setup

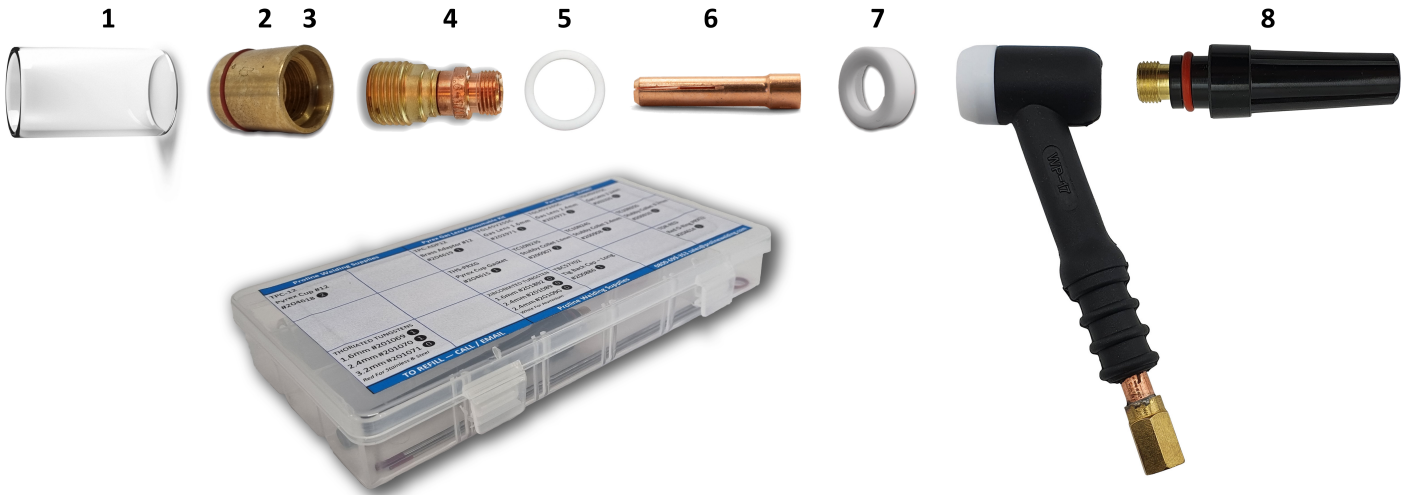

	Part Number	Product SKU	Description
1	TPC-12	204618	Strata #12 Pyrex Gas Lens Cup. Bore 19mm, Length 42mm
2	TOR-R	204614	Strata Red Oring for Pyrex #12 Gas Lens Cup
3	TPCA-12	204619	Strata Brass Adaptor with Oring (For Fitting #12 Pyrex Cups to SC Series Gas Lenses)
4	TGL45V25C	202971	Strata 1.6mm Compact Gas Lens Collet Body
	TGL45V26C	202972	Strata 2.4mm Compact Gas Lens Collet Body
	TGL45V27C	202325	Strata 3.2mm Compact Gas Lens Collet Body
5	THSG-12	204616	Strata PTFE Gasket for #12 Pyrex Cup
6	TC10N23S	200907	Strata 1.6mm Stubby Collet
	TC10N24S	200908	Strata 2.4mm Stubby Collet
	TC10N25S	200910	Strata 3.2mm Stubby Collet
7	THSP-12	204615	Strata PTFE Pad (Heat Shield) for #12 Pyrex Cup
8	TBC57Y04	TBC57Y04	Strata Short Back Cap
	TBC57Y03	202981	Strata Medium Back Cap
	TBC57Y02	24151	Strata Long Back Cap
9		204987	Promax WP17 Clear Pyrex Gas Lens Consumable Kit, Includes: 1x Gas Lens Body 1.6, 2.4mm 2x Collet 1.6, 2.4mm 2x Pyrex Cups #12 1x Pad, Gasket, Adaptor & Red O-ring 1x Long Back Cap 1x Thoriated Tungsten 1.6 & 2.4mm 1x Plastic Container

1. Install the heat shield

2. Install the gasket

3. Install the gas lens collet body

4. Install the brass adaptor with o-ring

5. Install the pyrex gas lens cup

6. Install the collet, tungsten and back cap

